

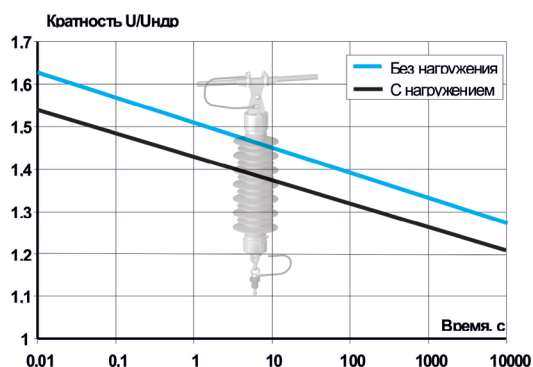




а – для типовых ОПН;

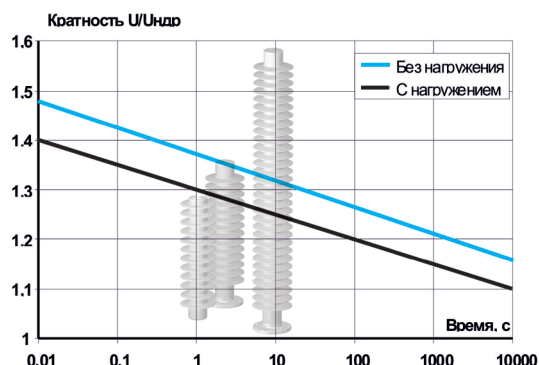

б – для ОПН исполнения «О»

Рис. 18 Характеристика «напряжение-время»

кВ, не более			№ рис	Высота, мм	Вес, кг	Длина пути тока утечки, см	Электрическая прочность корпуса		Отгрузочные данные		
8/20 μ s 10 кА	8/20 μ s 20 кА	1/10 μ s 10 кА					1.2/50 μ s	50 Гц, 1 мин	Размер тары, мм	шт. в таре	Вес брутто 1-ед.тары
130	145	141	33	574	8	140	190	80	670×480×220 (820×480×220)	3 (3)	30 (36)
179	201	195	34 (38)*	867 (1016)	11 (13)	260	450	210	940×480×220 (1090×480×220)	3 (3)	40 (47)
246	276	269	35 (39)*	1033 (1182)	15 (17)	315	450	210	1110×480×220 (1260×480×220)**	3 (3)	56 (64)
269	302	293	35 (39)*	1033 (1182)	15 (17)	315	450	210		3 (3)	56 (64)
282	316	307	35 (39)*	1033 (1182)	15 (17)	315	450	210		3 (3)	56 (64)
352	395	384	35 (39)*	1033 (1182)	15 (17)	315	450	210		3 (3)	56 (64)
282	316	307	36 (40)*	1151 (1300)	19 (21)	390	450	210	1210×480×220 (1350×480×220)	3 (3)	70 (77)
320	359	349	36 (40)*	1151 (1300)	19 (21)	390	450	210		3 (3)	70 (77)
256	287	279	35 (39)*	1033 (1182)	15 (17)	315	450	210	1100×480×220	3 (3)	56 (64)
352	395	384	36 (40)*	1151 (1300)	19 (21)	390	650	300	1250×480×220 (1400×480×220)	3 (3)	70 (77)
384	431	419	36 (40)*	1151 (1300)	19 (21)	390	650	300		3 (3)	70 (77)
493	553	537	37 (49)*	2132 (2317)	56(61)	630	1000	420	1080×480×270	1 (1)	70 (75)
522	585	569	37 (49)*	2132 (2317)	56(61)	630	1000	420		1 (1)	70 (75)
563	632	614	37 (49)*	2132 (2317)	56(61)	630	1000	420		1 (1)	70 (75)
512	574	558	37 (49)*	2132 (2317)	56(61)	630	1000	420		1 (1)	70 (77)

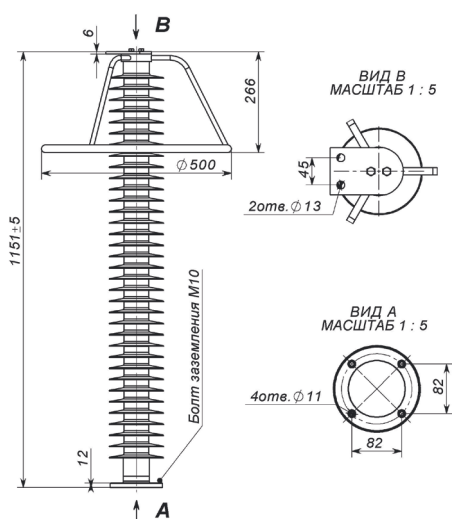


Рис. 36 ОПН-110 IV; 150 III

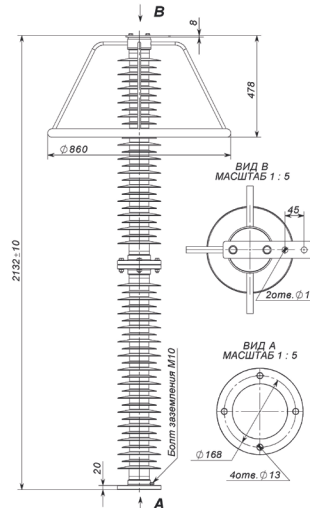


Рис. 37 ОПН-220 IV

